

☐ Order

☐ Enquiry

As at 06/01/22

Quantity:

Clear carcass dimensions:

Height: mm

Side thickness: mm


Width: mm

Undershelf: ☐ With undershelf/wall unit

Depth: mm


☐ Without undershelf/top cabinet

Running direction vertical:




☐ Locking at the bottom


Running direction horizontal:



☐ Locking on the left



☐ Locking on the right

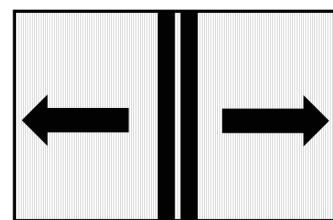

☐ 2 leaves

Colour

☐ Aluminium, silver-coloured, matt, smooth, E6/EV1

☐ Aluminium, stainless steel coloured, lightly brushed, E2/ES

☐ Lacquered according to RAL/NCS, colour:

☐ Matt

☐ Silk matt



☐ Silk gloss

Pilaster strip


☐ With pilaster strip

☐ Without pilaster strip

Pilaster strip

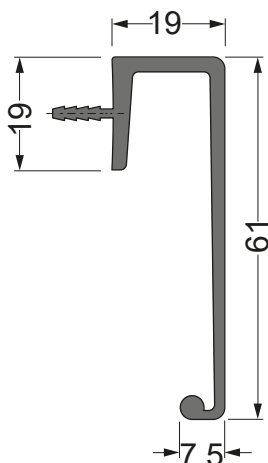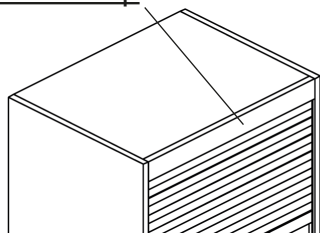


Roller shutter profile

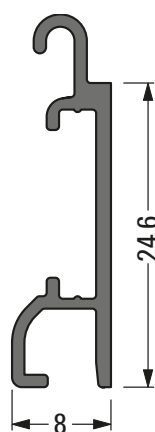


As at 06/01/22

Handle

☐ Handle

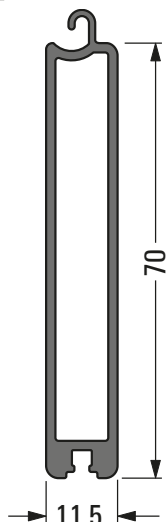


☐ Centre handle

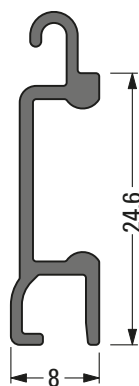


Height of the
centre handle
from the mat end
(handle)

mm

☐ Lock handle

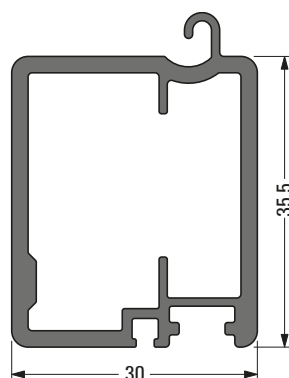

☐ Combination
handle

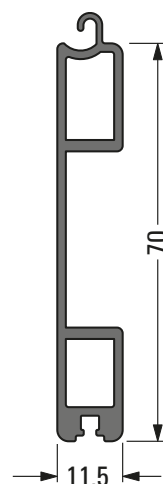

Lock and handle drill hole

Lock:

- ☐ With lock
☐ Without lock
☐ Milling customer lock:

Lock:
(Please specify exact manufacturer number)

Position:
(Please enclose drawing)


Handle drill hole:

- ☐ For one handle
☐ For two handles
☐ Without handle drill holes

Drilling distance:
 mm

Guide rails

Grooved in Classic Groove (plastic)

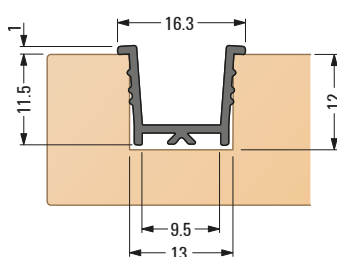


- ☐ ~RAL 9011 Graphite black
☐ ~RAL 7035 Light grey
☐ ~RAL 9010 Pure white

Mechanisms

- ☐ Without, run behind the rear wall
☐ Winding snail Loop 8 mm (max. 1700 mm)
☐ Weight compensation fitting
Back-Lift, behind the rear wall
(running direction vertical)
☐ Weight compensation Top-Lift
(running direction vertical)

As at 06/01/22

Grooved in
Flex Groove (plastic)
Middle radius min. 60 mm

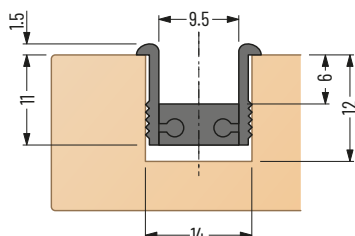


- ☐ ~RAL 9010 Pure white
- ☐ ~RAL 9005 Jet black
- ☐ ~RAL 9006
White aluminium

Mechanisms

- ☐ Without, run behind the rear wall
(submit sketch or drawing)

Internal
Alu-XL Inside Edge (aluminium / plastic)

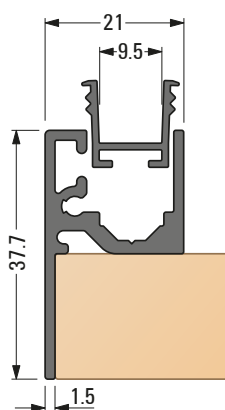


- ☐ Aluminium, silver-coloured, matt, smooth, E6/EV1
- ☐ Aluminium, stainless steel coloured, lightly brushed, E2/ES
- ☐ Aluminium, lacquered, RAL: _____

Mechanisms (running direction vertical)

- ☐ Electric drive motor box
 - ☐ Remote control 1 channel
 - ☐ Remote control 15 channels
 - ☐ Anti-lift device
 - ☐ Multiple control unit (min. 2 motors)
 - ☐ Flush-mounted surface switch
 - ☐ Surface-mounted surface switch
 - ☐ Flush-mounted key switch
 - ☐ Surface-mounted key switch

Internal
Alu-XL Inside (aluminium / plastic)

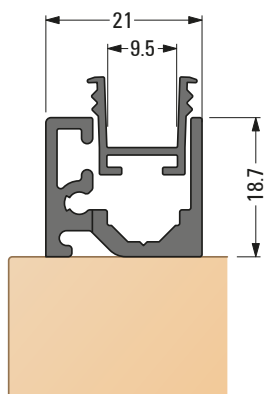

- ☐ Aluminium, silver-coloured, matt, smooth, E6/EV1
- ☐ Aluminium, stainless steel coloured, lightly brushed, E2/ES
- ☐ Aluminium, lacquered, RAL: _____

- ☐ Roll-Lift
- ☐ Alu-XL Box

As at 06/01/22

Sketches are very useful; please enclose them with the form.
Custom made - No return

Sketch:

Customer no.

Contact person

Phone

Date

Company

Consignment no.

Fax

Signature _____