

☐ Order


☐ Enquiry

As at 12/04/24

Quantity:

System with roller shutter mat made of 4 mm toughened safety glass

- slat height 40 mm
- incl. aluminium handle of a matching colour
- incl. aluminium cover profile of a matching colour
- incl. aluminium pilaster strip of a matching colour
- roller shutter box with integrated weight compensation fitting



Vertical

Clear carcass dimensions:

Height: mm

Width: mm

Depth: mm


Carcass design:

☐ with undershelf/
wall unit

☐ without undershelf/
top cabinet

☐ with recessed bottom

Cabinet width min. 400 mm – max. 900 mm

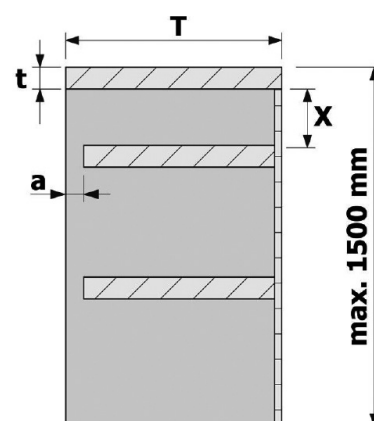

prefixed: inside:

Dimensions X	Side thickness t 16 mm	Side thickness t 18 mm	Side thickness t 19 mm
	☐	☐	☐
Cabinet height			
250 - 1600 mm	158 mm	156 mm	155 mm


Dimension T: min. 329 mm 344 mm
Dimension a: min. 13 mm 30 mm
Max. width 900 mm 900 mm

Guide Systems: Colours

- ☐ aluminium, silver-coloured, matt, smooth, E6/C0
- ☐ aluminium, stainless steel-coloured, lightly brushed, E2/ES
- ☐ aluminium, black anodised, matt, E6/C35

Pilaster Strip

prefixed:

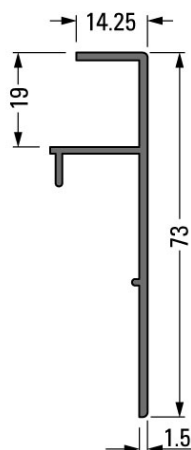


inside:




As at 12/4/24

Guide Rails (aluminium)


☐ **prefixed flush**
Alu-Light Top Edge*

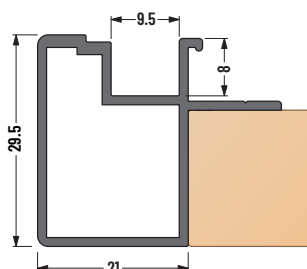

☐ **prefixed
Alu-Light Top**

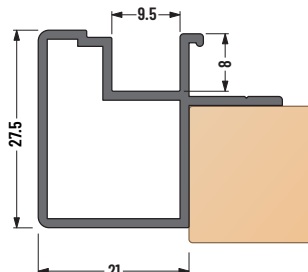

☐ **internal**
Alu-Light Inside

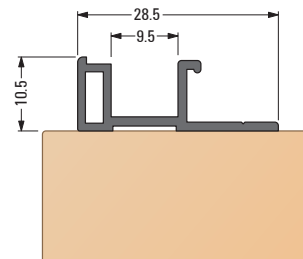

Motorised Drive (optional)


□ □ □

Guide rail	Handheld transmitter	LED sensor	Switch*
Top Edge 29.5 mm	✓	✓	✓
Top 27.5 mm	✓	✓	✓
Inside	✓	—	✓

*optional for the hand-held transmitter



Glass Design

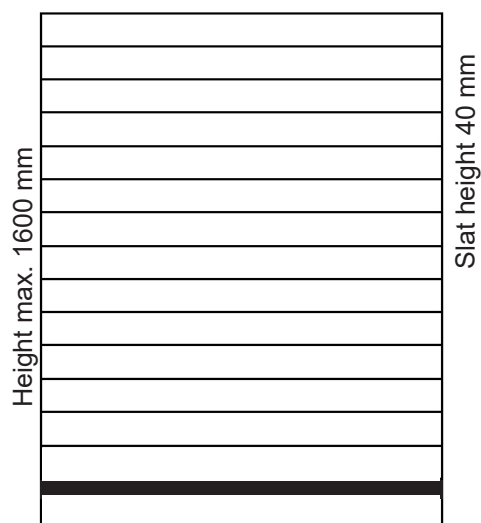

- ☐ Float white lacquered (extra white)
- ☐ Float black lacquered
- ☐ Satinato (extra white)
- ☐ Satinato
- ☐ Float dark grey
- ☐ Float
- ☐ Float (extra white)

Note on the widths:

Standard width: 600 and 900 mm
Variable width: 450 to 900 mm

min. 400 mm to max. 900 mm

As at 12/4/24

Sketches are very useful; please enclose them with the form.
Custom made - No return

Sketch:

Customer no.

Contact person

Phone

Date

Company

Consignment no.

Email

Signature