


As at 8/7/24

☐ Order
 ☐ Enquiry

Quantity:

Alu-Light 40 Box

- Slat height 40 mm, aluminium, silver natural lacquered
- Incl. aluminium handle in matching colour
- Incl. aluminium guide rails in matching colour
- incl. aluminium pilaster strip in matching colour
- roller shutter box with integrated weight compensation fitting

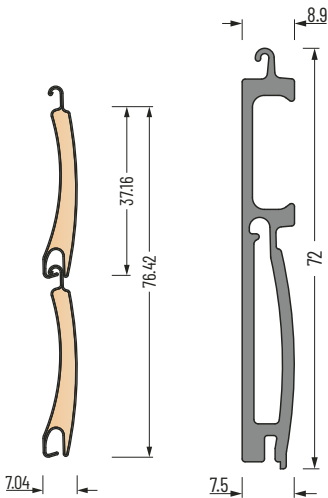

Clear carcass dimensions:

Height: mm

Width: mm

Depth: mm


Carcass design:

- ☐ with undershelf/ wall unit
- ☐ without undershelf/ top cabinet
- ☐ with recessed bottom

Cabinet width min. 400 mm – max. 2400 mm

Dimensions X	Side thickness t 16 mm	Side thickness t 18 mm	Side thickness t 19 mm
Cabinet height	☐	☐	☐
250 - 2200 mm*	158 mm	156 mm	155 mm

*from a height of 1501 mm, please observe the installation instructions 15.7 - 16.9

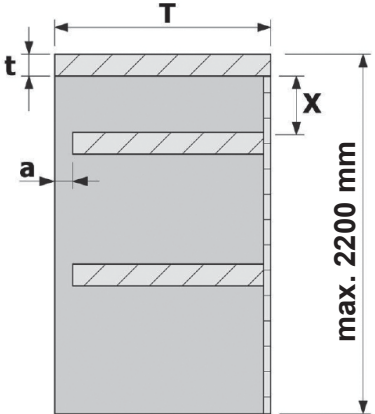


internal prefixed: prefixed:

Dimension T: min. 329 mm 344 mm
 Dimension a: min. 16 mm 25 mm
 Max. width 2400 mm 2400 mm

Centre handle

- ☐ With centre handle
- ☐ Without centre handle


Height of the centre handle to the bottom edge of the handle (mm):

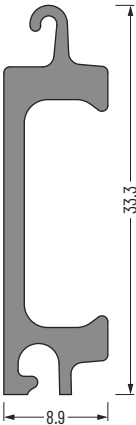


As at 8/7/24

Pilaster Strip


prefixed
Alu-Light Top Edge:

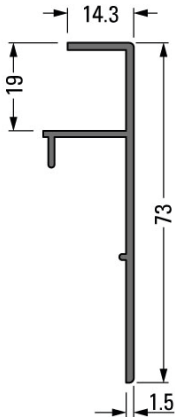


Internally prefixed
Alu-Light Inside Edge:

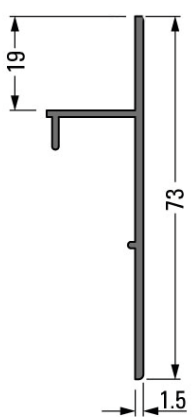

Guide Rails (aluminium)

☐ Alu-Light prefixed
Top Edge:
 

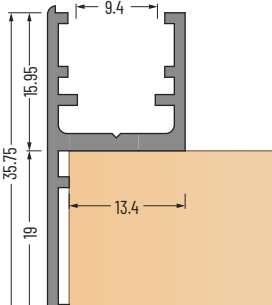☐ Internally prefixed
Alu-Light Inside Edge:
 

Motorised Drive (optional)

☐
☐
☐

Guide rail	Handheld transmitter	LED sensor	Switch*
Top Edge	✓	✓	✓
Inside Edge	✓	—	✓





*optional for the hand-held transmitter

As at 8/7/24

Lock and handle drill hole

Lock:

☐ With lock

☐ Without lock

☐ Milling customer lock:

Lock:

(Please specify exact manufacturer number)

Position:

(Please enclose drawing)

Handle drill hole:

☐ For one handle

☐ For two handles

☐ Without handle drill holes

Drilling distance:

mm

Sketches are very useful; please enclose them with the form.
Custom made - No return

Sketch:

Customer no.

Company

Contact person

Consignment no.

Phone

Email

Date

Signature