


REDOCOL FLUTED DOWELS

Pre-glued REDOCOL fluted dowels

DIAMETER (in MM) Ø
8

Tolerance and quantity per kg according to DIN norm 68150	DIN norm
Diameter and tolerance	+/- 0,2 mm
Length and tolerance (L)	+/- 1 mm
Chamfer (1/5 Ø +/- 1 mm) (X;Y)	1,6 +/- 1 mm
Tapering of the chamfer	60°
Number of grooves	20
Grooves	lengthwise
Wood type	Beech red or white, steamed or not steamed
Moisture (drying process: KD), store in a dry place	8-10%
Standard pressing time (depending on application conditions)	15-20 min.
Unit	10 kg
per pallet (100 x 120 cm)	500 kg
Adhesive/dowel ratio	1/10
Adhesive/dowel ratio	1 kg COLLANO DC 3050 adhesive / 10 kg of dowels
Colour	Blue, Red

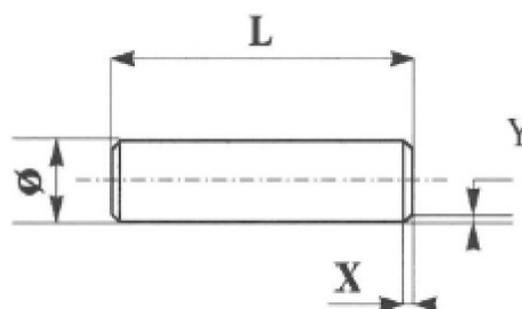

Item number	Length	Colour
610.9794	30 mm	Blue
610.9795	35 mm	Blue
610.9796	40 mm	Blue
610.9797	40 mm	Red
610.9798	35 mm	Red
610.9799	30 mm	Red